




SYMBOL OF QUALITY

An Iso 9001 : 2015 Certified Company



40 G

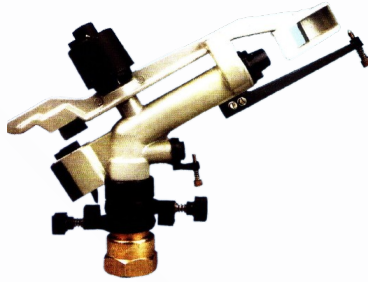


42 G



RIL 20



HT 46



RIL 40 M




RIL 25



RIL-20

Model	42G	40G	RIL40M	RIL25	RIL20	HT46
Connection	1½" BSP FEMALE	1¼" BSP FEMALE	1¼" BSP MALE	¾" BSP MALE	¾" BSP MALE	¾" BSP MALE
Discharge ltr/min	152 - 533	62 - 311	120 - 373	40 - 80.5	18 - 52.5	13.20 - 52.4
Pressure Range (Kg/cm²)	2 - 6	1.5 - 5	2.8 - 4.5	2.11 - 4.22	2.11 - 4.22	1 - 4
Radius (mtr)	20 - 36	16.5 - 29	20 - 32	16.5 - 20	11.5 - 18.5	9.75 - 17.5
Material of Construction	Aluminum Body with Brass Bush	Aluminum Body with Brass Bush	Aluminum Body with Brass Bush	Gun Metal	Gun Metal	Engg. Plastic



Lil Nasikko & Co.

LNC GROUP